TERRIER SEAL Data Sheet

Acme Reg No: 1910017

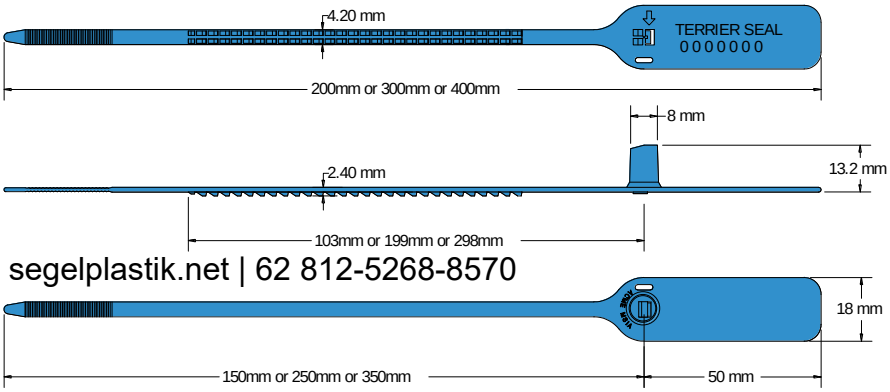

segelplastik.net | 62 812-5268-8570

The Acme **Terrier Seal** is a pull tight seal manufactured from Polypropylene material. The strap lock configuration is similar to that of the Combilock seal but is smaller in width and therefore suitable for applications where there is a small sealing aperture and strength is a requirement. This seal is suitable for most applications.

Technical Data

Recommended Applications

Airlines, Refineries, Warehouses, Cash bags, Postbags, Mailrooms, Bar boxes, Fire doors, Lockers.

Material

Polypropylene with Biodegradable additives

Available Operating Length

(L1) 15cm (overall 20cm)
(L2) 25cm (overall 30cm)
(L3) 35cm (overall 40cm)

Strap Width

4.20mm

Average Application Breaking Strength

20kg

Marking

Laser or Foil marking
Consecutively numbered as standard
Optional Customer name/logo
Optional Laser Barcoding

Colours

Foil marked: red, blue, green, yellow, orange, black, white.
Laser or Foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.
Other colours may be available on request.

Packaging

Standard Packaging	: 10 per mat and 1,000 seals/carton
Carton Dimensions	: (L1) - 36cm x 21cm x 21cm
	: (L2) - 40cm x 25cm x 21cm
	: (L3) - 50cm x 23cm x 20cm
Carton (gr) weight	: (L1) - 2.6kg/carton
	: (L2) - 3.1kg/carton
	: (L3) - 3.7kg/carton

Acme Seals (Malaysia) Sdn Bhd
No. 10, Jalan BP 4, Bandar Bukit Puchong,
47120 Puchong, Selangor Darul Ehsan, Malaysia.
Tel: +603 8062 8738 / Fax: +603 8060 8731

Acme Seals Limited
Unit 9, Rosewood Business Park
Eastways, Witham, Essex, CM8 3AA, United Kingdom
Tel: +44 (0) 1376 521841 / Fax: +44 (0) 1376 521617

www.acmeseals.com